



# WTB16I-39112120ZZZ

W16

PHOTOELECTRIC SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ

### Ordering information

| Type               | part no. |
|--------------------|----------|
| WTB16I-39112120ZZZ | 1222674  |

Other models and accessories → [www.sick.com/W16](http://www.sick.com/W16)



### Detailed technical data

#### Features

|   |   |
|---|---|
| <b>Functional principle</b>   | Photoelectric proximity sensor  |
| <b>Functional principle detail</b>  | Background suppression  |
| <b>Sensing range</b>  |   |
| Sensing range min.  | 10 mm   |
| Sensing range max.  | 1,500 mm  |
| Adjustable switching threshold for background suppression                                       | 100 mm ... 1,500 mm   |
| Reference object  | Object with 90% remission factor (complies with standard white according to DIN 5033) |
| Minimum distance between set sensing range and background (black 6% / white 90%)                | 70 mm, at a distance of 600 mm  |
| Recommended sensing range for the best performance  | 100 mm ... 600 mm   |
| <b>Emitted beam</b>   |   |
| Light source  | LED   |
| Type of light   | Infrared light  |
| Shape of light spot   | Point-shaped  |
| Light spot size (distance)  | Ø 12 mm (800 mm)  |
| Maximum dispersion of the emitted beam around the standardized transmission axis (squint angle) | < +/- 1.0° (at Ta = +23 °C)   |
| <b>Key LED figures</b>  |   |
| Normative reference   | EN 62471:2008-09   IEC 62471:2006, modified   |
| LED risk group marking  | Free group  |

|                   |                       |  |
|-------------------|-----------------------|--|
|                   | Wave length           | 850 nm   |
|                   | Average service life  | 100,000 h at $T_a = +25\text{ °C}$   |
| <b>Adjustment</b> |                       |  |
|                   | Teach-Turn adjustment | BluePilot: For setting the sensing range   |
| <b>Display</b>    |                       |  |
|                   | LED blue              | BluePilot: sensing range indicator   |
|                   | LED green             | Operating indicator<br>Static on: power on   |
|                   | LED yellow            | Status of received light beam<br>Static on: object present<br>Static off: object not present |

### Safety-related parameters

|                                     |           |
|-------------------------------------|-----------|
| <b>MTTF<sub>D</sub></b>             | 626 years |
| <b>DC<sub>avg</sub></b>             | 0 %       |
| <b>T<sub>M</sub> (mission time)</b> | 20 years  |

### Electronics

|                                     |  |
|-------------------------------------|--|
| <b>Supply voltage U<sub>B</sub></b> | 10 V DC ... 30 V DC <sup>1)</sup>  |
| <b>Ripple</b>                       | ≤ 5 V <sub>pp</sub>  |
| <b>Usage category</b>               | DC-12 (According to EN 60947-5-2)<br>DC-13 (According to EN 60947-5-2)   |
| <b>Current consumption</b>          | ≤ 30 mA, without load. At U <sub>B</sub> = 24 V <sup>2)</sup>  |
| <b>Protection class</b>             | III  |
| <b>Digital output</b>               |  |
|                                     | Number 2 (Complementary)   |
|                                     | Type Push-pull: PNP/NPN  |
|                                     | Switching mode Light/dark switching  |
|                                     | Signal voltage PNP HIGH/LOW Approx. U <sub>B</sub> -2.5 V / 0 V  |
|                                     | Signal voltage NPN HIGH/LOW Approx. U <sub>B</sub> / < 2.5 V   |
|                                     | Output current I <sub>max</sub> ≤ 100 mA   |
|                                     | Circuit protection outputs Reverse polarity protected<br>Overcurrent and short-circuit protected                 |
|                                     | Response time ≤ 500 μs <sup>3)</sup>   |
|                                     | Repeatability (response time) 150 μs   |
|                                     | Switching frequency 1,000 Hz <sup>4)</sup>   |
| <b>Pin/Wire assignment</b>          |  |
|                                     | Function of pin 4/black (BK) Digital output, dark switching, object present → output $\bar{Q}$ LOW <sup>5)</sup> |
|                                     | Pin 5 function/white (WH) Digital output, light switching, object present → output Q HIGH                        |

<sup>1)</sup> Limit values.

<sup>2)</sup> 10 V DC ... 16 V DC, without load.

<sup>3)</sup> Signal transit time with resistive load in switching mode.

<sup>4)</sup> With light/dark ratio 1:1.

<sup>5)</sup> This switching output must not be connected to another output.

## Mechanics

|   |   |
|---|---|
| <b>Housing</b>  | Rectangular   |
| <b>Dimensions (W x H x D)</b>                         | 20 mm x 55.7 mm x 42 mm                               |
| <b>Connection</b>                                     | Cable with Q6 male connector, 6-pin, DC-coded, 298 mm |
| <b>Connection detail</b>                              |   |
| Deep-freeze property                                  | Do not bend below 0 °C                                |
| Conductor size  | 0.14 mm <sup>2</sup>                                  |
| Cable diameter  | Ø 4.8 mm  |
| Length of cable (L)                                   | 270 mm  |
| Bending radius  | For flexible use > 12 x cable diameter                |
| Bending cycles  | 1,000,000   |
| <b>Material</b>                                       |   |
| Housing   | Plastic, VISTAL®                                      |
| Front screen  | Plastic, PMMA   |
| Cable   | Plastic, PVC  |
| Male connector  | Plastic, VISTAL®                                      |
| <b>Weight</b>   | Approx. 70 g  |
| <b>Maximum tightening torque of the fixing screws</b> | 1.3 Nm  |

## Ambient data

|  |  |
|--|--|
| <b>Enclosure rating</b>                    | IP65 (EN 60529)  |
| <b>Ambient operating temperature</b>       | -40 °C ... +60 °C  |
| <b>Ambient temperature, storage</b>        | -40 °C ... +75 °C  |
| <b>Shock resistance</b>                    | 50 g, 11 ms (25 positive and 25 negative shocks per axis, for X, Y, Z axes, 150 shocks in total (EN60068-2-27))<br>50 g, 6 ms (5,000 positive and 5,000 negative shocks per axis, for X, Y, Z axes, 30,000 shocks in total (EN60068-2-27)) |
| <b>Vibration resistance</b>                | 10 Hz ... 2,000 Hz (Amplitude 0.5 mm / 10 g, 20 sweeps per axis, for X, Y, Z axes, 1 octave/min, (EN60068-2-6))  |
| <b>Air humidity</b>                        | 35 % ... 95 %, relative humidity (no condensation)   |
| <b>Electromagnetic compatibility (EMC)</b> | EN 60947-5-2   |
| <b>UL File No.</b>                         | NRKH.E181493 & NRKH7.E181493   |

## Certificates


|  |   |
|--|---|
| <b>EU declaration of conformity</b>                      | ✓ |
| <b>UK declaration of conformity</b>                      | ✓ |
| <b>ACMA declaration of conformity</b>                    | ✓ |
| <b>Moroccan declaration of conformity</b>                | ✓ |
| <b>China RoHS</b>  | ✓ |
| <b>ECOLAB certificate</b>                                | ✓ |
| <b>cULus certificate</b>                                 | ✓ |
| <b>Photobiological safety (DIN EN 62471) certificate</b> | ✓ |

## Classifications

|                   |          |
|-------------------|----------|
| <b>ECLASS 5.0</b> | 27270904 |
|-------------------|----------|

|                       |          |
|-----------------------|----------|
| <b>ECLASS 5.1.4</b>   | 27270904 |
| <b>ECLASS 6.0</b>     | 27270904 |
| <b>ECLASS 6.2</b>     | 27270904 |
| <b>ECLASS 7.0</b>     | 27270904 |
| <b>ECLASS 8.0</b>     | 27270904 |
| <b>ECLASS 8.1</b>     | 27270904 |
| <b>ECLASS 9.0</b>     | 27270904 |
| <b>ECLASS 10.0</b>    | 27270904 |
| <b>ECLASS 11.0</b>    | 27270904 |
| <b>ECLASS 12.0</b>    | 27270903 |
| <b>ETIM 5.0</b>       | EC002719 |
| <b>ETIM 6.0</b>       | EC002719 |
| <b>ETIM 7.0</b>       | EC002719 |
| <b>ETIM 8.0</b>       | EC002719 |
| <b>UNSPSC 16.0901</b> | 39121528 |


Dimensional drawing, sensor

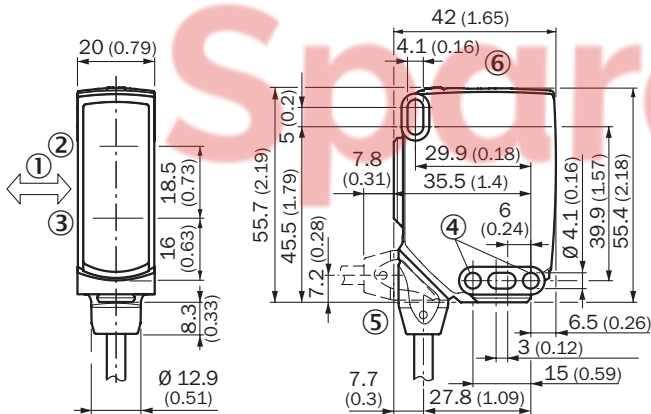

Dimensions in mm (inch)


- ① Standard direction of the material being detected
- ② Center of optical axis, sender
- ③ Center of optical axis, receiver
- ④ Mounting hole,  $\varnothing$  4.1 mm
- ⑤ Connection
- ⑥ display and adjustment elements

display and adjustment elements




- ① LED indicator green
- ② LED indicator yellow
- ③ Teach-Turn adjustment
- ④ LED blue

Connection type Cubic connector, 6-pin



Connection diagram Cd-425

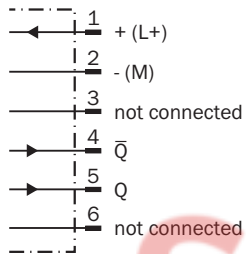

Truth table Push-pull: PNP/NPN - light switching Q


|                         | Light switching Q (normally open (upper switch), normally closed (lower switch)) |                              |
|-------------------------|--|------------------------------|
|                         | Object not present → Output LOW  | Object present → Output HIGH |
| Light receive           | ✗  | ✔                            |
| Light receive indicator | ✗  | ☀                            |
| Load resistance to L+   | ⚡  | ✗                            |
| Load resistance to M    | ✗  | ⚡                            |
|                         |  |                              |

Truth table Push-pull: PNP/NPN – dark switching  $\bar{Q}$


|                         | Dark switching $\bar{Q}$ (normally closed (upper switch), normally open (lower switch)) |                             |
|-------------------------|---|-----------------------------|
|                         | Object not present → Output HIGH  | Object present → Output LOW |
| Light receive           | ⊗   | ☑                           |
| Light receive indicator | ⊗   | ☉                           |
| Load resistance to L+   | ⊗   | ⚡                           |
| Load resistance to M    | ⚡   | ⊗                           |
|                         |   |                             |

Characteristic curve

Minimum distance in mm (y) between the set sensing range and white background (90 % remission)

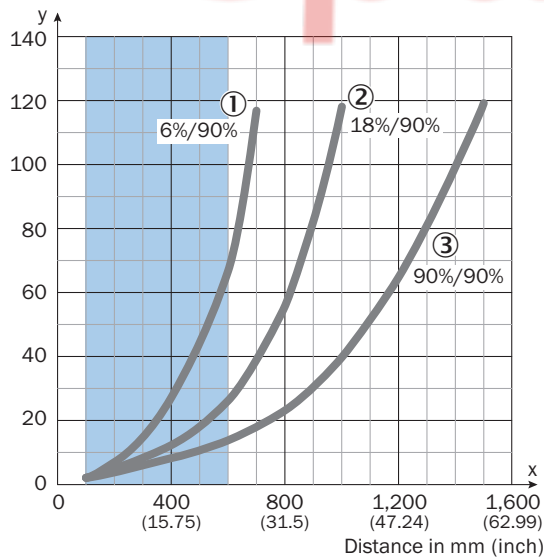

Example:  
Safe suppression of the background


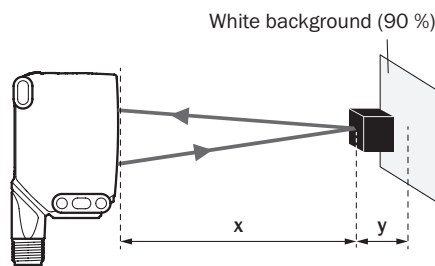


Black object (6 % remission)  
Set sensing range x = 600 mm  
Needed minimum distance to white background y = 70 mm

Recommended sensing range for the best performance


- ① Black object, 6% remission factor
- ② Gray object, 18% remission factor
- ③ White object, 90% remission factor

Light spot size WTB16I-xxxx1xx, WTB16I-xxxxAxx

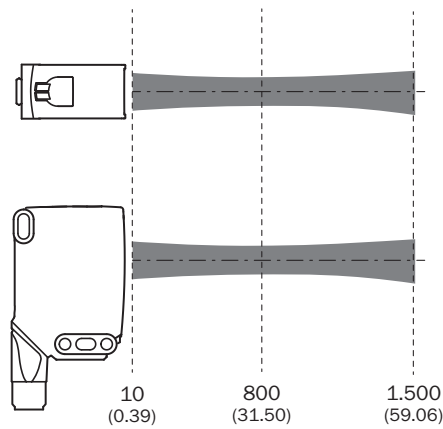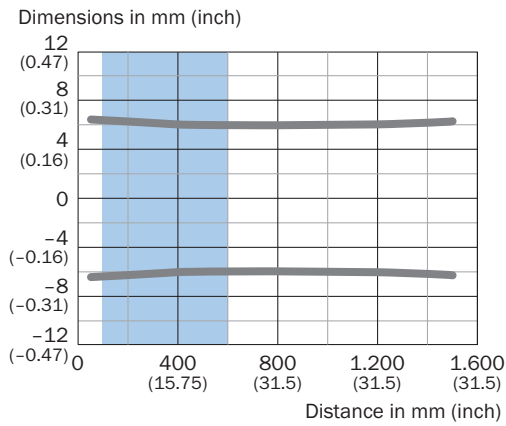

Recommended sensing range for the best performance

Sensing range diagram

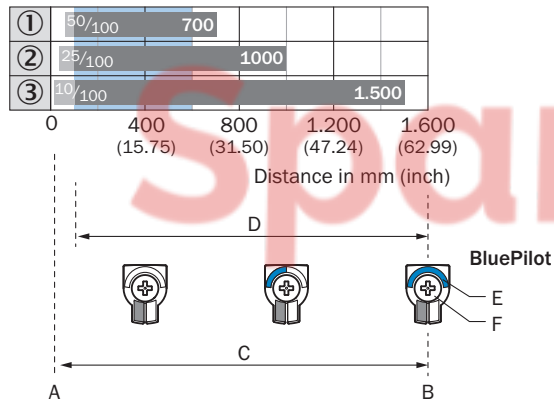






Recommended sensing range for the best performance

|   |   |
|---|---|
|   |   |
| 1 | Black object, 6% remission factor                         |
| 2 | Gray object, 18% remission factor                         |
| 3 | White object, 90% remission factor                        |
| A | Sensing range min. in mm                                  |
| B | Sensing range max. in mm                                  |
| C | Field of view   |
| D | Adjustable switching threshold for background suppression |
| E | Sensing range indicator                                   |
| F | Teach-Turn adjustment                                     |

Recommended accessories

Other models and accessories → [www.sick.com/W16](http://www.sick.com/W16)

|   | Brief description  | Type          | part no. |
|---|--|---------------|----------|
| connectors and cables   |  |               |          |
|    | <ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Female connector, 6-pin, angled, DC-coded</li> <li>• <b>Connection type head B:</b> Flying leads</li> <li>• <b>Signal type:</b> Sensor/actuator cable</li> <li>• <b>Cable:</b> 2 m, PVC</li> <li>• <b>Description:</b> Sensor/actuator cable, unshielded</li> </ul>  | DOL-1306-W02M | 6030217  |
| Mounting systems  |  |               |          |
|    | <ul style="list-style-type: none"> <li>• <b>Description:</b> Mounting bracket with articulated arm</li> <li>• <b>Material:</b> Steel</li> <li>• <b>Details:</b> Steel, zinc coated</li> <li>• <b>Items supplied:</b> Mounting hardware included</li> <li>• <b>Suitable for:</b> W16, W26, W11, W12, W23, W27, Dx50, W280, G10</li> </ul>   | BEF-WN-MULTI2 | 2093945  |
|    | <ul style="list-style-type: none"> <li>• <b>Description:</b> Plate N02 for universal clamp bracket</li> <li>• <b>Material:</b> Steel, zinc diecast</li> <li>• <b>Details:</b> Zinc plated steel (sheet), Zinc die cast (clamping bracket)</li> <li>• <b>Items supplied:</b> Universal clamp (5322626), mounting hardware</li> <li>• <b>Usable for:</b> W4S-3 Glass, W10, W4SLG-3, W4S-3 Inox, W4S-3 Inox Glass, W9, W11-2, W12-3, W12-2 Laser, W12G, W12 Teflon, W16, W250, W250-2, PowerProx, W11G-2, TranspaTect, WTT12, UC12, P250, G6 Inox, W4S, W4SL-3V, W4SLG-3V, W4SL-3H</li> </ul> | BEF-KHS-N02   | 2051608  |
|   | <ul style="list-style-type: none"> <li>• <b>Description:</b> Mounting bracket, large</li> <li>• <b>Material:</b> Stainless steel</li> <li>• <b>Details:</b> Stainless steel</li> <li>• <b>Items supplied:</b> Mounting hardware included</li> <li>• <b>Suitable for:</b> W11-2, W12-3, W16</li> </ul>  | BEF-WG-W12    | 2013942  |
|  | <ul style="list-style-type: none"> <li>• <b>Description:</b> Adapter for mounting W16 sensors in existing W14-2/W18-3 installations or L25 sensors in existing L28 installations</li> <li>• <b>Material:</b> Plastic</li> <li>• <b>Details:</b> Plastic</li> <li>• <b>Items supplied:</b> Fastening screws included</li> </ul>   | BEF-AP-W16    | 2095677  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

### WORLDWIDE PRESENCE:

Contacts and other locations – [www.sick.com](http://www.sick.com)

SpareCruX