



# ACM36-K1K0-K01

ACS/ACM36

**ABSOLUTE ENCODERS**

**SICK**  
Sensor Intelligence.



## Ordering information

| Type           | part no. |
|----------------|----------|
| ACM36-K1K0-K01 | 6039751  |

Other models and accessories → [www.sick.com/ACS\\_ACM36](http://www.sick.com/ACS_ACM36)

Illustration may differ



## Detailed technical data

## Safety-related parameters

|                                                          |                                          |
|----------------------------------------------------------|------------------------------------------|
| <b>MTTF<sub>D</sub> (mean time to dangerous failure)</b> | 850 years (EN ISO 13849-1) <sup>1)</sup> |
|----------------------------------------------------------|------------------------------------------|

<sup>1)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40 °C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

## Performance

|                                                                                 |                                                     |
|---------------------------------------------------------------------------------|-----------------------------------------------------|
| <b>Number of steps per revolution (max. resolution)</b>                         | 2,979                                               |
| <b>Number of revolutions</b>                                                    | 16 (4 bit)                                          |
| <b>Max. resolution (number of steps per revolution x number of revolutions)</b> | 4 bit (2,979 x 16)                                  |
| <b>Resolution per measuring step</b>                                            | ≥ 5.2 μA <sup>1)</sup>                              |
| <b>Resolution</b>                                                               | 0.11° ... 1.93° <sup>1)</sup>                       |
| <b>Measurement range</b>                                                        | 0° ... 5,760°, programmable                         |
| <b>Minimum measuring range</b>                                                  | ≥ 336°                                              |
| <b>Accuracy</b>                                                                 | ± 0.2 % based on the programmed angle <sup>1)</sup> |

<sup>1)</sup> See measuring step diagram/calculation formula for details.

## Interfaces

|                                           |                              |
|-------------------------------------------|------------------------------|
| <b>Communication interface</b>            | Analog                       |
| <b>Communication Interface detail</b>     | Current                      |
| <b>Code sequence parameter adjustable</b> | CW (clockwise) <sup>1)</sup> |
| <b>Load resistance</b>                    | ≤ 600 Ω                      |

<sup>1)</sup> Default clockwise - CCW possible via Keyboard programming.

## Electronics

|                                    |                      |
|------------------------------------|----------------------|
| <b>Connection type</b>             | Cable, radial, 1.5 m |
| <b>Supply voltage</b>              | 19 ... 33 V DC       |
| <b>Current consumption</b>         | < 80 mA              |
| <b>Reverse polarity protection</b> | ✓                    |
| <b>Electrical wiring</b>           | 3-wire               |

## Mechanics

|                                       |                                 |
|---------------------------------------|---------------------------------|
| <b>Mechanical design</b>              | Solid shaft, Servo flange       |
| <b>Shaft diameter</b>                 | 6 mm                            |
| <b>Shaft length</b>                   | 12.4 mm                         |
| <b>Characteristics of the shaft</b>   | With flat                       |
| <b>Weight</b>                         | 0.1 kg                          |
| <b>Shaft material</b>                 | Stainless steel 1,4305          |
| <b>Flange material</b>                | AlMgSi                          |
| <b>Housing material</b>               | AlMgSi                          |
| <b>Material, cable</b>                | PVC                             |
| <b>Start up torque</b>                | 0.5 Ncm (+20 °C)                |
| <b>Operating torque</b>               | 0.2 Ncm (+20 °C)                |
| <b>Permissible shaft loading</b>      | 40 N (radial)<br>20 N (axial)   |
| <b>Operating speed</b>                | ≤ 10,000 min <sup>-1</sup>      |
| <b>Moment of inertia of the rotor</b> | 10 gcm <sup>2</sup>             |
| <b>Bearing lifetime</b>               | 1 x 10 <sup>6</sup> revolutions |
| <b>Angular acceleration</b>           | ≤ 500,000 rad/s <sup>2</sup>    |

## Ambient data

|                                      |                                            |
|--------------------------------------|--------------------------------------------|
| <b>EMC</b>                           | According to EN 61000-6-2 and EN 61000-6-4 |
| <b>Enclosure rating</b>              | IP65                                       |
| <b>Permissible relative humidity</b> | 90 % (Condensation not permitted)          |
| <b>Operating temperature range</b>   | -30 °C ... +80 °C                          |
| <b>Storage temperature range</b>     | -40 °C ... +100 °C, without package        |
| <b>Resistance to shocks</b>          | 25 g, 11 ms (EN 60068-2-27)                |
| <b>Resistance to vibration</b>       | 4 g, 5 Hz ... 100 Hz (EN 60068-2-6)        |

## Certificates


|                                       |   |
|---------------------------------------|---|
| <b>EU declaration of conformity</b>   | ✓ |
| <b>UK declaration of conformity</b>   | ✓ |
| <b>ACMA declaration of conformity</b> | ✓ |
| <b>China RoHS</b>                     | ✓ |

## Classifications

|                     |          |
|---------------------|----------|
| <b>ECLASS 5.0</b>   | 27270502 |
| <b>ECLASS 5.1.4</b> | 27270502 |
| <b>ECLASS 6.0</b>   | 27270590 |
| <b>ECLASS 6.2</b>   | 27270590 |
| <b>ECLASS 7.0</b>   | 27270502 |
| <b>ECLASS 8.0</b>   | 27270502 |
| <b>ECLASS 8.1</b>   | 27270502 |
| <b>ECLASS 9.0</b>   | 27270502 |
| <b>ECLASS 10.0</b>  | 27270502 |


|                |          |
|----------------|----------|
| ECLASS 11.0    | 27270502 |
| ECLASS 12.0    | 27270502 |
| ETIM 5.0       | EC001486 |
| ETIM 6.0       | EC001486 |
| ETIM 7.0       | EC001486 |
| ETIM 8.0       | EC001486 |
| UNSPSC 16.0901 | 41112113 |

Dimensional drawing

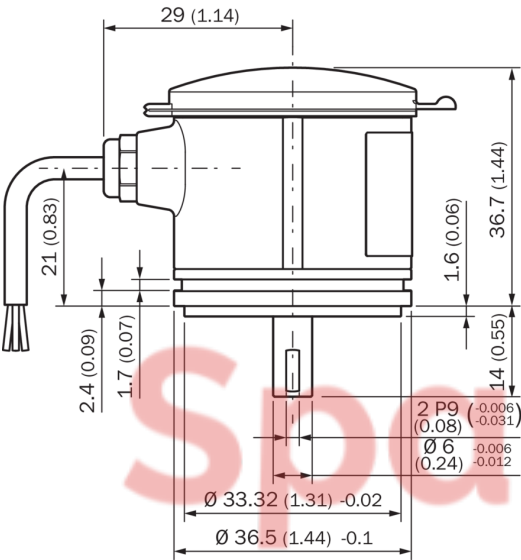


Dimensions in mm (inch)

PIN assignment




## Resolution diagram Multiturn, current output

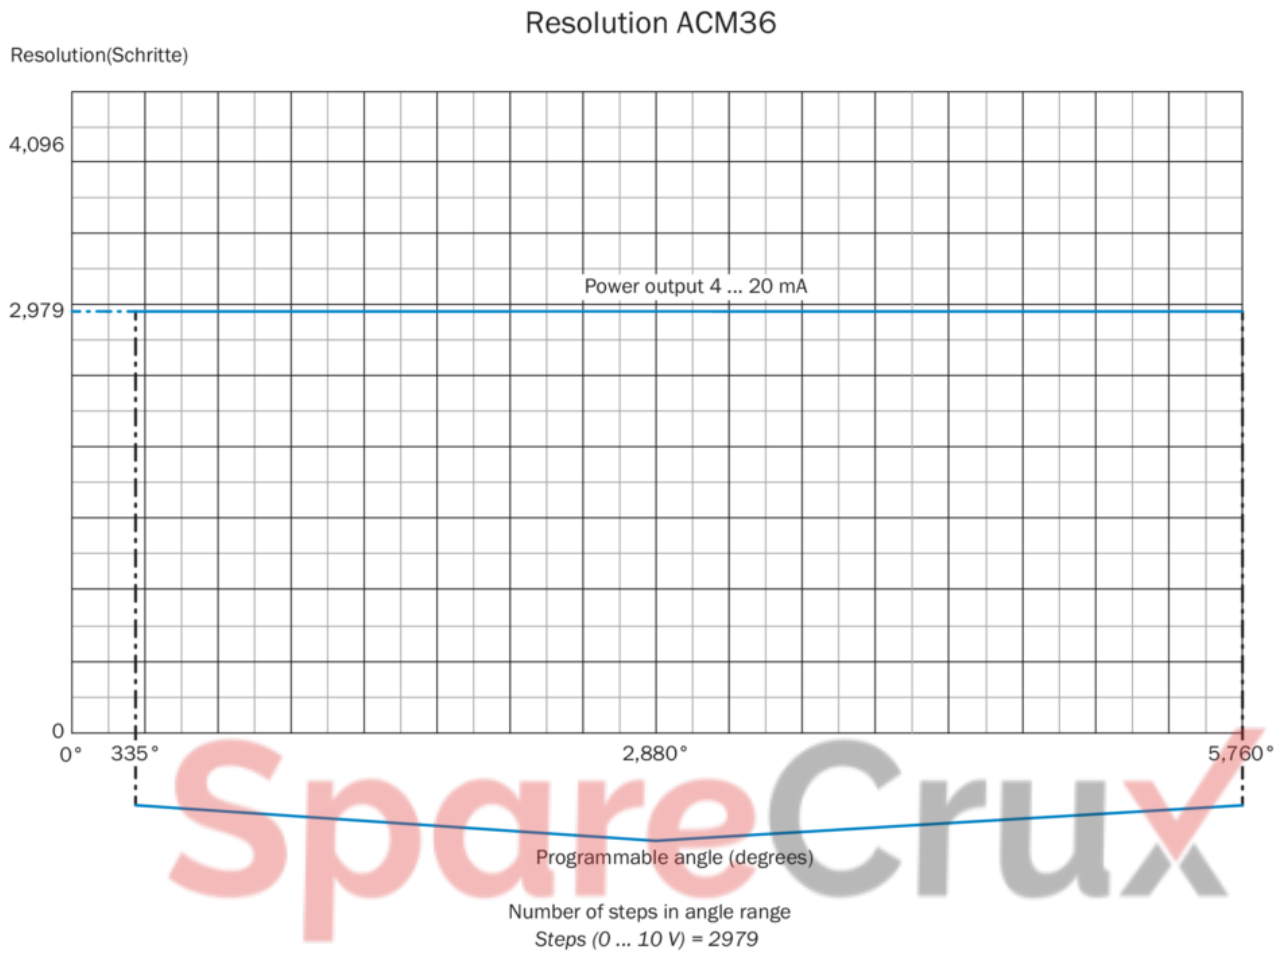

Configured range ( $\alpha$ ) must be at least 10°

## Electrical wiring Current output

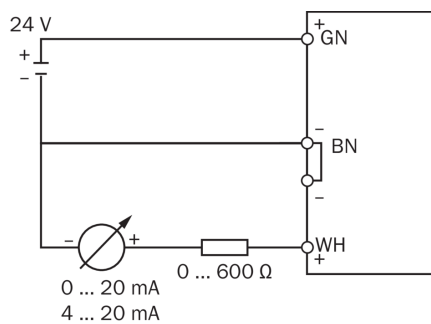

3-wire technology

At a supply voltage of 18 V, the internal resistance of the measuring device must not exceed 600 ohm.

Recommended accessories

Other models and accessories → [www.sick.com/ACS\\_ACM36](http://www.sick.com/ACS_ACM36)

|                                                                                   | Brief description                                                                                                                                                                                                                                                                                                                      | Type       | part no. |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------|
| connectors and cables                                                             |                                                                                                                                                                                                                                                                                                                                        |            |          |
|  | <ul style="list-style-type: none"><li>• <b>Connection type head A:</b> Female connector, M12, 5-pin, straight, A-coded</li><li>• <b>Description:</b> Unshielded</li><li>• <b>Connection systems:</b> Screw-type terminals</li><li>• <b>Permitted cross-section:</b> ≤ 0.75 mm²</li></ul>                                               | DOS-1205-G | 6009719  |
|                                                                                   | <ul style="list-style-type: none"><li>• <b>Connection type head A:</b> Male connector, M12, 5-pin, straight, A-coded</li><li>• <b>Description:</b> Unshielded</li><li>• <b>Connection systems:</b> Screw-type terminals</li><li>• <b>Permitted cross-section:</b> ≤ 0.75 mm²</li><li>• <b>Note:</b> For field bus technology</li></ul> | STE-1205-G | 6022083  |

SpareCruX

|                                                                                     | Brief description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Type       | part no. |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------|
| shaft adaptation                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |            |          |
|    | <ul style="list-style-type: none"> <li><b>Product segment:</b> Shaft adaptation</li> <li><b>Product:</b> Shaft couplings</li> <li><b>Description:</b> Bellows coupling, shaft diameter 6 mm / 10 mm, maximum shaft offset: radial <math>\pm 0.25</math> mm, axial <math>\pm 0.4</math> mm, angular <math>\pm 4^\circ</math>; max. speed 10,000 rpm, <math>-30^\circ\text{C}</math> to <math>+120^\circ\text{C}</math>, max. torque 120 Ncm; material: stainless steel bellows, aluminum hub</li> </ul>                                                                                                                              | KUP-0610-B | 5312982  |
|    | <ul style="list-style-type: none"> <li><b>Product segment:</b> Shaft adaptation</li> <li><b>Product:</b> Shaft couplings</li> <li><b>Description:</b> Spring washer coupling, shaft diameter 6 mm / 10 mm, Maximum shaft offset: radial <math>\pm 0.3</math> mm, axial <math>\pm 0.4</math> mm, angular <math>\pm 2.5^\circ</math>; max. speed 12,000 rpm, <math>-10^\circ</math> to <math>+80^\circ\text{C}</math>, max. torque 60 Ncm; material: aluminum flange, glass fiber-reinforced polyamide membrane and hardened steel coupling pin</li> </ul>                                                                            | KUP-0610-F | 5312985  |
|    | <ul style="list-style-type: none"> <li><b>Product segment:</b> Shaft adaptation</li> <li><b>Product:</b> Shaft couplings</li> <li><b>Description:</b> Bellows coupling, shaft diameter 6 mm / 6 mm, maximum shaft offset: radial <math>\pm 0.25</math> mm, axial <math>\pm 0.4</math> mm, angular <math>\pm 4^\circ</math>; max. speed 10,000 rpm, <math>-30^\circ\text{C}</math> to <math>+120^\circ\text{C}</math>, max. torque 120 Ncm; material: stainless steel bellows, aluminum hub</li> </ul>                                                                                                                               | KUP-0606-B | 5312981  |
|    | <ul style="list-style-type: none"> <li><b>Product segment:</b> Shaft adaptation</li> <li><b>Product:</b> Shaft couplings</li> <li><b>Description:</b> Double-loop coupling, shaft diameter 6 mm / 6 mm, maximum shaft offset: radial <math>\pm 2.5</math> mm, axial <math>\pm 3</math> mm, angular <math>\pm 10^\circ</math>; max. speed 3,000 rpm, <math>-30^\circ\text{C}</math> to <math>+80^\circ\text{C}</math>, max. torque 1.5 Nm; material: polyurethane, galvanized steel flange</li> </ul>                                                                                                                                | KUP-0606-D | 5340152  |
|    | <ul style="list-style-type: none"> <li><b>Product segment:</b> Shaft adaptation</li> <li><b>Product:</b> Shaft couplings</li> <li><b>Description:</b> Bar coupling, shaft diameter 6 mm / 8 mm, maximum shaft offset radial <math>\pm 0.3</math> mm, axial <math>\pm 0.2</math> mm, angle <math>\pm 3^\circ</math>, max. speed 10,000 rpm, torsion spring rigidity 38 Nm/wheel; material: fiber-glass reinforced polyamide, aluminum hub</li> </ul>                                                                                                                                                                                 | KUP-0608-S | 5314179  |
|   | <ul style="list-style-type: none"> <li><b>Product segment:</b> Shaft adaptation</li> <li><b>Product:</b> Shaft couplings</li> <li><b>Description:</b> Double loop coupling, shaft diameter 6 mm / 10 mm, max. shaft offset: radially <math>\pm 2.5</math> mm, axially <math>\pm 3</math> mm, angle <math>\pm 10</math> degrees; max. speed 3,000 rpm, <math>-30</math> to <math>+80</math> degrees Celsius, torsional spring stiffness of 25 Nm/rad</li> </ul>                                                                                                                                                                      | KUP-0610-D | 5326697  |
|  | <ul style="list-style-type: none"> <li><b>Product segment:</b> Shaft adaptation</li> <li><b>Product:</b> Shaft couplings</li> <li><b>Description:</b> Bar coupling, shaft diameter 6 mm / 10 mm, max. shaft offset: radial <math>\pm 0.3</math> mm, axial <math>\pm 0.3</math> mm, angular <math>\pm 3^\circ</math>; max. speed 10,000 rpm, <math>-10^\circ</math> to <math>+80^\circ\text{C}</math>, max. torque: 80 Ncm, material: fiber-glass reinforced polyamide, aluminum hub</li> </ul>                                                                                                                                      | KUP-0610-S | 2056407  |
|  | <ul style="list-style-type: none"> <li><b>Product segment:</b> Shaft adaptation</li> <li><b>Product:</b> Shaft couplings</li> <li><b>Description:</b> Cross-slotted coupling, shaft diameter 6 mm / 6 mm, maximum shaft offset: radial <math>\pm 0.3</math> mm, axial <math>\pm 0.2</math> mm, angle <math>\pm 3^\circ</math>; max. speed 10,000 rpm, <math>-10^\circ</math> to <math>+80^\circ\text{C}</math>, max. torque 80 Ncm; material: fiber-glass reinforced polyamide, aluminum hub</li> </ul>                                                                                                                             | KUP-0606-S | 2056406  |
|  | <ul style="list-style-type: none"> <li><b>Product segment:</b> Shaft adaptation</li> <li><b>Product:</b> Shaft couplings</li> <li><b>Description:</b> Claw coupling, shaft diameter 6 mm / 6 mm, damping element 80 shore blue, maximum shaft offset: radial <math>\pm 0.22</math> mm, axial <math>\pm 1</math> mm angular <math>\pm 1.3^\circ</math>, max. speed 19,000 rpm, angle of twist max. <math>10^\circ</math>, <math>-30^\circ\text{C}</math> to <math>+80^\circ\text{C}</math>, max. torque 800 Ncm, tightening torque of screws: ISO 4029 150 Ncm, material: aluminum flange, damping element: polyurethane</li> </ul>  | KUP-0606-J | 2127057  |
|  | <ul style="list-style-type: none"> <li><b>Product segment:</b> Shaft adaptation</li> <li><b>Product:</b> Shaft couplings</li> <li><b>Description:</b> Claw coupling, shaft diameter 6 mm / 10 mm, damping element 80 shore blue, maximum shaft offset: radial <math>\pm 0.22</math> mm, axial <math>\pm 1</math> mm angular <math>\pm 1.3^\circ</math>, max. speed 19,000 rpm, angle of twist max. <math>10^\circ</math>, <math>-30^\circ\text{C}</math> to <math>+80^\circ\text{C}</math>, max. torque 800 Ncm, tightening torque of screws: ISO 4029 150 Ncm, material: aluminum flange, damping element: polyurethane</li> </ul> | KUP-0610-J | 2127056  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations – [www.sick.com](http://www.sick.com)

SpareCruX